

Product Datasheet

AVerVision® 355AF

Interactive Visualizer

Enrich Classroom Experience

- Unmatched 5.0-megapixel image clarity
- Picture-perfect HD 1080p output resolution
- 80X total zoom including 10X AVer® Optical zoom
- One-touch recording to external storage devices
- Plug-and-play from SDHC card or USB OTG
- All-new versatile AVer+ software



Product Specifications & Features

Image / Video

Image Sensor	1/2.5" CMOS Color Image Sensor
Total Pixels	5M Pixels
Output Resolution	HD 1080p (1920 x 1080)
Lens	F=3.2 (Wide), F=6.8 (Tele); fl = 6.26 ~ 30.75mm
Zoom	80X Total Zoom (10X AVer® Optical Zoom + 8X Digital Zoom)
Frame Rate	24fps (Max.)
Focus	Auto / Manual
Shooting Area	400 x 300mm (Max.)

Functions

Image Rotation	Camera Head 0° / 90° / -90° Electronic Rotation 0° / 90° / 180° / 270°
Internal Storage	Built-in Memory (80 images (5M); 240 images (XGA))
External Storage	SDHC (32GB Max.) / USB drive (64GB Max.)
On-Screen Display (OSD)	Provided
Image Effects	Color / B&W / Negative / Mirror / Freeze
Image Adjust (White Balance / Exposure / Night View)	Auto / Manual
AVerPresenter	Provided (AVerBox & AVerVisor)
Split Screen	Provided (Vertical & Horizontal)
Picture-in-Picture	Provided
Display Mode	Text / Graphics / High Frame / Macro / Infinite / Microscope
Capture Mode	Single / Continuous
User Profiles	Up to 3
Timer	Provided

Patent No.: Taiwan 149208, France 201377, Spain 2190764, China 255699, Taiwan 174124, Taiwan 1276904, Japan 3122844, Taiwan 1290434

© 2008-2010 AVerMedia INFORMATION, Inc.

All rights reserved. No part of this document may be reproduced, transmitted, transcribed, stored in a retrieval system, transmitted in any form, or translated into any language by any means (electronically, mechanically, photocopied, recorded, etc.) without the prior written permission of AVerMedia. Information in this document is subject to change without notice. The information contained herein is for informational purposes only and shall not be considered legally binding. "AVerVision" and "AVer" are trademarks (or registered trademarks) of AVerMedia Information, Inc. Other trademarks used herein for description purposes only belong to each of their respective companies. Version 1.2

Product Datasheet

Flicker Filter Control	Provided (2 Levels)
Remote Control	Provided (with Laser Pointer)

Connectivity

RGB Input/Output	Provided (15-Pins D-sub, Pass Through)
DVI-I Output	Provided
Composite Video Output	Provided (NTSC / PAL)
RS-232 Port	Provided (with Composite Video / RS-232 Adapter Cable)
Mini USB 2.0 Port	Provided (PC Camera / Built-in Image Download)
Power Consumption	20W (Max.)

Lighting

Light Source	Embedded LED Lamp
Laser Positioning Guide	Provided

Others

Dimension	Operating: 471.3mm x 173.5mm x 542.7mm Folded: 366.7mm x 173.5mm x 63.2mm
Net Weight	2kg (4.4lbs)
Power Supply	DC 12V
Certifications	FCC, CE

Package Content

AVerVision®355AF Unit	Remote Control with Batteries
AVer+ Software CD	User Manual CD
Power Adapter	Quick Guide
RGB Cable	Warranty Card
USB Cable	Anti-Glare Sheet
Composite Video / RS-232 Adapter Cable	Carrying Bag

Panel



Patent No.: Taiwan 149208, France 201377, Spain 2190764, China 255699, Taiwan 174124, Taiwan 1276904, Japan 3122844, Taiwan 1290434

© 2008-2010 AVerMedia INFORMATION, Inc.

All rights reserved. No part of this document may be reproduced, transmitted, transcribed, stored in a retrieval system, transmitted in any form, or translated into any language by any means (electronically, mechanically, photocopied, recorded, etc.) without the prior written permission of AVerMedia. Information in this document is subject to change without notice. The information contained herein is for informational purposes only and shall not be considered legally binding. "AVerVision" and "AVer" are trademarks (or registered trademarks) of AVerMedia Information, Inc. Other trademarks used herein for description purposes only belong to each of their respective companies. Version 1.2

Product Datasheet

Optional Accessories



Security Bracket



Microscope Adapter



Light Box

All-New AVer+ Software

AVer+ software offers a brand new user interface that allows you to draw and make notes on top of images, record video and audio, set up a multiple-user network, and much more.

System Requirements

For PC

Windows XP

- Intel Pentium III 1 GHz or later x86 processor (Intel Core 2 Duo 1.66GHz recommended)
- 512 MB of RAM (1 GB recommended)
- 100 MB free hard disk space for basic installation (without content in Gallery)


Windows Vista

- Intel Core Duo 1.5 GHz or later x86 processor (Intel Core 2 Duo 1.66GHz recommended)
- 1 GB of RAM (2 GB recommended)
- 100 MB free hard disk space for basic installation (without content in Gallery)

For Mac

Mac OS X 10.4 and later

- 1GHz G4 processor or Intel Core Duo 1.83 GHz or later x86 processor (Intel Core 2 Duo 2.0 GHz recommended)
- 1 GB of RAM (2 GB recommended)
- 100 MB free hard disk space for basic installation (without content in Gallery)

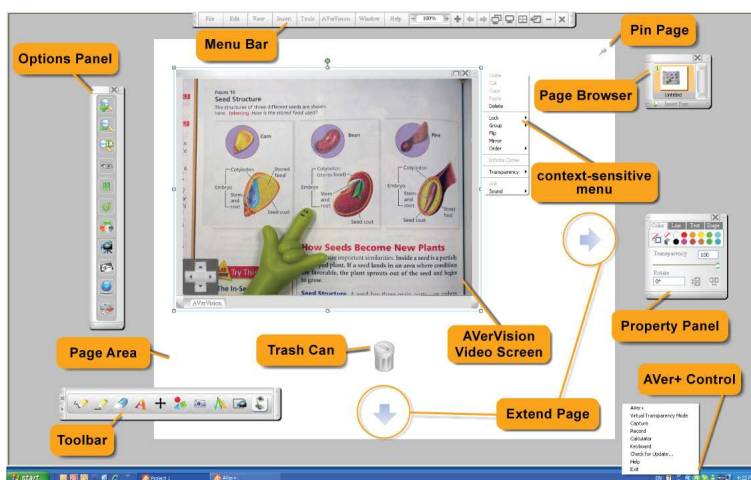

Patent No.: Taiwan 149208, France 201377, Spain 2190764, China 255699, Taiwan 174124, Taiwan 1276904, Japan 3122844, Taiwan 1290434

© 2008-2010 AVerMedia INFORMATION, Inc.

All rights reserved. No part of this document may be reproduced, transmitted, transcribed, stored in a retrieval system, transmitted in any form, or translated into any language by any means (electronically, mechanically, photocopied, recorded, etc.) without the prior written permission of AVerMedia. Information in this document is subject to change without notice. The information contained herein is for informational purposes only and shall not be considered legally binding. "AVerVision" and "AVer" are trademarks (or registered trademarks) of AVerMedia Information, Inc. Other trademarks used herein for description purposes only belong to each of their respective companies. Version 1.2